

Drawing No.	Rev.	Page
LR-E-A18	E	1 / 5


<h1>SPECIFICATIONS</h1>	Drawn	S. Takei 9. Apr. '20
	Checked	T. Ishizaki 10. Apr. '20
	Approved	T. Motoshita 10. Apr. '20

1. General Specifications

Model	LR□-E-□□	
Operating Voltage	24V DC	
Operating Ambient Temperature	-20°C ~ +50°C	
Operating Ambient Humidity	Less than 90% RH (No Condensation)	
Mass (Tolerance±10%)	LR4	0.035kg
	LR5	0.04kg
	LR6	0.06kg
	LR7	0.065kg
Outer Dimensions	Refer to the 3.Outer Dimensions	
Remarks	Due to the characteristics of the LED elements, a variation in difference of the color tone and brightness of every product may occur.	
	There are no contents of controlled substances exceeding the threshold for the RoHS Directive.	

2. Model

2.1.1 Model Number Configuration

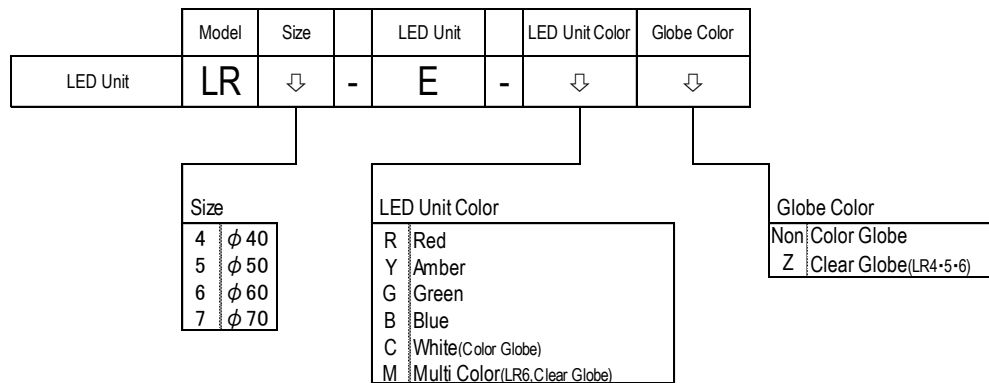

2.1.2 Model Number Example

LED Unit	LR4-E-C ● φ 40 ● LED Unit ● White ● Color Globe(Clear)
	LR4-E-YZ ● φ 40 ● LED Unit ● Amber ● Clear Globe
	LR5-E-R ● φ 50 ● LED Unit ● Red ● Color Globe(Red)
	LR6-E-MZ ● φ 60 ● LED Unit ● Multi Color ● Clear Globe

